




Reciprocating Air Saws



ATEX Certified

Ideal for cutting metal, timber and fiberglass

RECIPROCATING SAWS

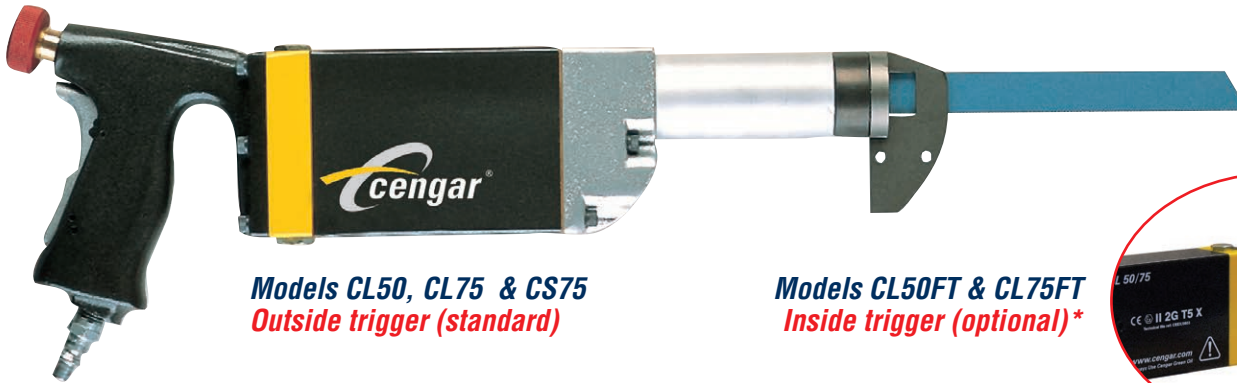

Models CL50, CL75 & CS75
Outside trigger (standard)

Models CL50FT & CL75FT
*Inside trigger (optional)**



Low Vibration • Low Noise

- Workhorses for use in the fabrication, shipbuilding, ship repair, oil and petrochemical, boat building and aircraft maintenance fields, as well as by fire and rescue professionals
- Fitted with easy-to-use STOP/Isolator button on the handle for safety when changing blades
- CL50 uses any 1/2" (12mm) wide Bi-metal hand or machine blade – easily converted to a CL75 by changing the nosepiece
- CL75 and CS75 use a 3/4" (19mm) wide Bi-metal machine blade
- Optional inside trigger order CL50FT or CL75FT (inside trigger for hand-held use only; not for use with a clamp – this trigger style cannot be locked on)



Model CS75 accurately cuts steel pipe up to 6" dia.



Model CS75 includes a Clamp Fixing Kit and standard Pipe/Profile Clamp (P/N CCG3)

CS75 Standard Equipment: Clamp Fixing Kit, standard Pipe/Profile Clamp (P/N CCG3), five MB250/10-14 saw blades, air tool oil and plastic carrying case.

Models CL50 & CL75 / CL50FT & CL75FT and CS75

Motor Power	1 HP
Stroke Length	1 3/4"
Strokes per Min.	1200
Weight	5 1/2 lbs.
Length x Height x Width	15 3/4" x 5 1/4" x 1 5/8"
Air Consumption	5 3/4 CFM
Air Pressure	90 PSI
Air Connection	1/4" NPT
Air Hose	1/4" ID
Noise Level*	83 dB(a)
Vibration Level*	3.69 m/s ²

* Model CS75: Noise Level is 92.4 dB(a) and Vibration Level is 3.2 m/s²

CL50, CL75, CL50FT and CL75FT Standard Equipment: carrying case, five MC220/24 saw blades, air tool oil, CD operating manual, allen key.



Reciprocating Air Saws



ATEX Certified

Compact, Quiet & Reliable

Low Vibration/Low Air Volume
Cut Pipe, Structural Steel, Sheet Metal, Fiberglass, Plastic and More.

RECIPROCATING SAWS

- Piston air motors use low air volume (CFM) while maintaining a fast cutting speed (2000 to 10,000 strokes per minute)
- Safe around gas and other flammable materials; recommended for fire and rescue applications where high CFM isn't available
- ATEX Certified – for use in hazardous areas
- CL and PL saws use standard hand hacksaw blades; convert to a 3/4" blade size simply by changing the nosepiece
- Rugged saw bodies constructed of heavy-duty cast steel and aluminum
- Built-in lubrication system automatically lubricates the motor
- Safety STOP/Isolator button disconnects air supply



Lubricating Oils (see pgs. 17, 39)

- ProLube™ is a super-premium, low-viscosity synthetic air tool lubricant
- ProLube-ATL/AF is a special blend preventing freezing in cold climate conditions

MS Cleaner (MS 9105)

- An ideal conditioner for air tools used underwater



PL Saws - For High-volume Production Environments

p. 5



CL Saws - For Demanding Maintenance Applications

p. 6



JP Saws - For Fiberglass and Sheet Metal Production

p. 7

Cengar Air Saw Blades

1/2" Wide Bi-metal Blades (for CL50, JP901 and PL905)

HB300/18	Hand	18 TPI	12" L
HB300/24	Hand	24 TPI	12" L
HB300/32	Hand	32 TPI	12" L
MC220/18	Machine	18 TPI	8 ³ / ₄ " L
MC220/24	Machine	24 TPI	8 ³ / ₄ " L
MYN150/18	Notched Yellow	18 TPI	6" L
MYT150/18	Tapered Yellow	18 TPI	6" L

3/4" Wide Bi-metal Blades (for CL75)

MB150/18	Machine	18 TPI	6" L
MB200/10-14	Machine	10/14 TPI	8" L
MB200/18	Machine	18 TPI	8" L
MB200/24	Machine	24 TPI	8" L
MB250/18	Machine	18 TPI	10" L
MB250/24	Machine	24 TPI	10" L
MB300/10-14	Machine	10/14 TPI	12" L
MB300/18	Machine	18 TPI	12" L