



SPECIFICATION SHEET

S10ATAFR/5BK-ES6



ATA® FR TECHNOLOGY MULTI-WIDTH SLEEVES OFFER A5 CUT RESISTANCE

- Proprietary ATA® Technology provides ANSI A5 cut protection and ANSI Level 3 flame resistance (ASTM F1358 -08 Vertical Flame Test)
- Black color sleeves help to hide dirt and grime
- Three widths are available, narrow, standard and wide for a personalized fit; great for workers with thin to bulky arms
- No-Slip elastic at the top of the sleeve helps to keep sleeves in place
- Color-coded overedge indicates width of sleeve, red indicates narrow, yellow indicates standard and green indicates wide, for ease in sorting
- Knit wrist helps prevent sleeve from riding up and is less binding than an elastic wrist - plus offers cut protection from top to bottom
- Made in the U.S.A

APPLICATIONS

- Automotive assembly
- Metal fabrication
- Glass manufacturing
- Metal stamping

CARE INSTRUCTIONS

Machine wash in warm water with detergent. Rinse well and spin extract using high speed. Tumble dry on low heat setting. Can be Dry-Cleaned. Do Not Bleach.

TECHNICAL DATA

MATERIAL	ATA® FR Technology
CONSTRUCTION	Machine knit, 10 Gauge
COLOR	■ Black
SIZES	18" & 22" Additional lengths available upon request
PACKAGING	72 each per case
CASE DIMENSIONS	20" x 14" x 11.5" / 50.8cm x 35.5cm x 29.21cm
CASE WEIGHT	14.5 lbs. / 6.57kg
COO	USA

BARCODES

ITEM	EACH	DOZEN	CASE
■ S10ATAFR/5BK-EW-ES6-22T	616314384189	10616314384186	20616314384183
■ S10ATAFR/5BK-ES6-22T	616314380860	10616314380867	20616314380864
■ S10ATAFR/5BK-NW-ES6-22T	616314381645	10616314381642	20616314381649
■ S10ATAFR/5BK-EW-ES6-22	616314381683	10616314381680	20616314381687
■ S10ATAFR/5BK-ES6-22	616314381720	10616314381727	20616314381724
■ S10ATAFR/5BK-NW-ES6-22	616314381768	10616314381765	20616314381762
■ S10ATAFR/5BK-EW-ES6-18T	616314384141	10616314384148	20616314384145
■ S10ATAFR/5BK-ES6-18T	616314380624	10616314380621	20616314380628
■ S10ATAFR/5BK-NW-ES6-18T	616314381621	10616314381628	20616314381625
■ S10ATAFR/5BK-EW-ES6-18	616314381669	10616314381666	20616314381663
■ S10ATAFR/5BK-ES6-18	616314381706	10616314381703	20616314381700
■ S10ATAFR/5BK-NW-ES6-18	616314381744	10616314381741	20616314381748




PERFORMANCE PROPERTIES

- ASTM F2992-15 - Level A4 Cut Resistance
- ASTM F1358-08 Vertical Flame Test - passes Level 3
- ASTM D3884-09 - Level 1 Abrasion Resistance

DIMENSIONS (in/cm)

	NARROW	STANDARD	WIDE
	■ Red Overedge	■ Yellow Overedge	■ Green Overedge
A	18" / 45.7 or 22" / 55.8	18" / 45.7 or 22" / 55.8	18" / 45.7 or 22" / 55.8
B	4.5" / 11.4	5" / 12.7	5.5" / 14
C	5.5" / 14	6" / 15.2	6.5" / 16.5

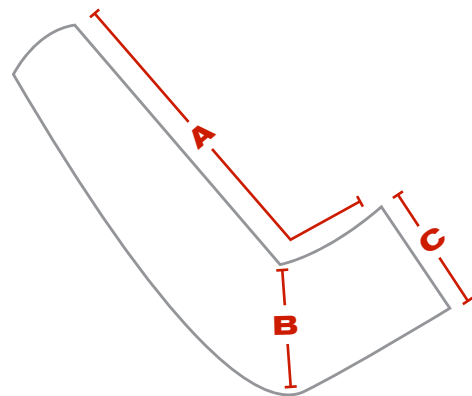

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.