



# SPECIFICATION SHEET

## S10ATAFRCM/4-ES6



### ATA® TECHNOLOGY MULTI-WIDTH SLEEVES WITH STA-COOL® COMFORT OFFER A4 CUT RESISTANCE

- Proprietary ATA® Technology provides ANSI A4 cut protection and ANSI Level 2 flame resistance (ASTM F1358-08 Vertical Flame Test)
- Sta-Cool® plating inside the sleeve feels cool against the skin, and helps to wick away moisture for greater wearer comfort
- Three widths are available, narrow, standard and wide for a personalized fit; great for workers with thin to bulky arms
- No-Slip elastic at the top of the sleeve helps to keep sleeves in place
- Color-coded overedge indicates width of sleeve, red indicates narrow, yellow indicates standard and green indicates wide, for ease in sorting
- Made in the U.S.A

### APPLICATIONS

- Automotive assembly
- Metal fabrication
- Glass manufacturing
- Metal stamping

### CARE INSTRUCTIONS

Machine wash in warm water with detergent. Rinse well and spin extract using high speed. Tumble dry on low heat setting. Can be Dry-Cleaned. Do Not Bleach.

### TECHNICAL DATA

MATERIAL	ATA® Technology with Sta-Cool®
CONSTRUCTION	Machine knit, 10 Gauge
COLOR	Yellow
SIZES	18" & 22" Additional lengths available upon request
PACKAGING	72 each per case
CASE DIMENSIONS	20" x 14" x 11.5" / 50.8cm x 35.5cm x 29.21cm
CASE WEIGHT	14.5 lbs. / 6.57kg
COO	USA

### BARCODES

ITEM	EACH	DOZEN	CASE
■ S10ATAFRCM/4-EW-ES6-22T	616314384943	10616314384940	20616314384947
■ S13ATAFR/4HA-ES6-22T	616314385025	10616314385022	20616314385029
■ S13ATAFR/4HA-NW-ES6-22T	616314385100	10616314385107	20616314385104
■ S13ATAFR/4HA-EW-ES6-22	616314385186	10616314385183	20616314385180
■ S13ATAFR/4HA-ES6-22	616314385261	10616314385268	20616314385265
■ S13ATAFR/4HA-NW-ES6-22	616314385346	10616314385343	20616314385340
■ S13ATAFR/4HA-EW-ES6-18T	616314384905	10616314384902	20616314384909
■ S13ATAFR/4HA-ES6-18T	616314384981	10616314384988	20616314384985
■ S13ATAFR/4HA-NW-ES6-18T	616314385063	10616314385060	20616314385067
■ S13ATAFR/4HA-EW-ES6-18	616314385148	10616314385145	20616314385142
■ S13ATAFR/4HA-ES6-18	616314385223	10616314385220	20616314385227
■ S13ATAFR/4HA-NW-ES6-18	616314385308	10616314385305	20616314385302




### PERFORMANCE PROPERTIES

- ASTM F2992-15 - Level A4 Cut Resistance
- ASTM F1358-08 Vertical Flame Test - passes Level 2
- ASTM D3884-09 - Level 1 Abrasion Resistance

### DIMENSIONS (in/cm)

	NARROW	STANDARD	WIDE
	■ Red Overedge	■ Yellow Overedge	■ Green Overedge
<b>A</b>	18" / 45.7 or 22" / 55.8	18" / 45.7 or 22" / 55.8	18" / 45.7 or 22" / 55.8
<b>B</b>	4.5" / 11.4	5" / 12.7	5.5" / 14
<b>C</b>	5.5" / 14	6" / 15.2	6.5" / 16.5

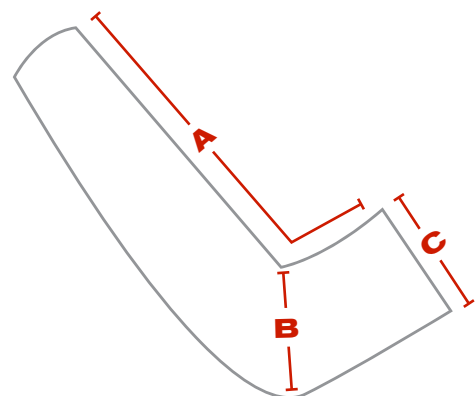

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.